


## Quick Setup Guide

FHD Security Camera




To view this guide in other languages (e.g. Nederlands, Deutsch, Français, Español), and for detailed manuals, tools, etc., please visit [foscam.com/downloads](http://foscam.com/downloads).

V1.0.8

## Setting Up Your Foscam Security Camera

### A Getting Started


#### Package Contents

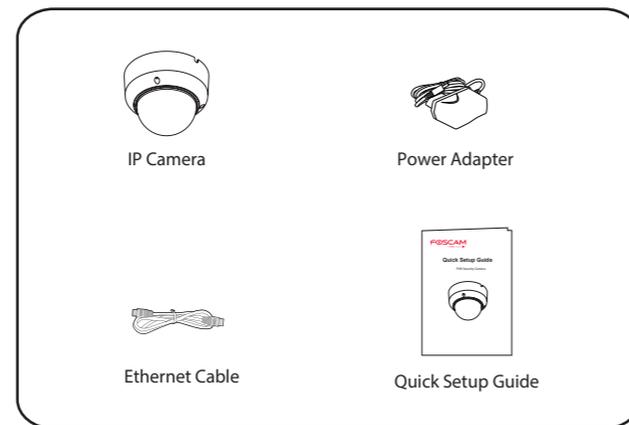


#### Security Tips

- Please change the password of your camera regularly, using a combination of numbers, letters and special characters.
- We recommend that you regularly update your camera to the latest available software and firmware versions to help ensure the best experience for your camera.

### B Physical Description

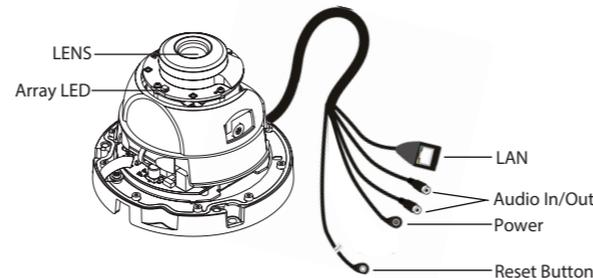

### C Setting Up Your Camera: Wired Connection via Foscam App

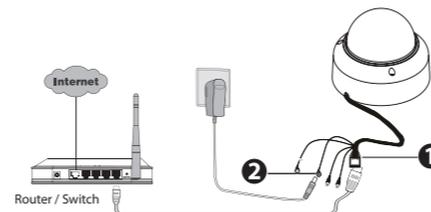

**Note:** A power adapter is unnecessary if the router / switch supports PoE (Power over Ethernet) functionality, otherwise, please connect the power adapter to the camera.

#### Minimum Requirements:

To help ensure a smoother video experience on the smartphone, it's recommended that your smartphone has the following:

- iOS: version 8.1 or higher.
- Android: 4.1 or higher, using a device with a Graphics Processing Unit (GPU) function.

### Camera Setup Steps:

1. Connect the camera to your Internet router using an Ethernet cable.
2. Connect the power adapter to the camera, and wait for a few moments until the camera alerts you that the "Wired connection succeeded" (if the device is connected with the audio output device).
3. From your smartphone, search for "Foscam" via the App Store or Google Play Store. Download, install and open the App to begin configuration.
4. Under screen select "Tap to add a camera" and then select "Camera", after that scan the QR code, which is located at the bottom of your camera (see illustrations below).



Tap + button



Scan the QR code which is located on your camera.

5. Wait a few moments for camera added successfully and set the camera name, then from the home screen, tap the play icon within the video feed box to bring up the camera credentials screen. For your security, please set a new username and password for your camera (see illustrations below).



Camera added successfully!



Camera Login

**Note:** If you want to add a deleted camera again on the Foscam app, you must first reset the camera, then reinstall according to the above Camera Setup Steps.

### D Other Ways to Access Your Camera

#### ■ Foscam VMS



Foscam VMS is a new tool for PC. It does not require plug-ins and is compatible with Windows & Mac, It supports all Foscam HD cameras and up to 36 cameras at the same time. If you would like to manage multiple cameras, we suggest you install the Foscam VMS. You can download the "Foscam VMS" from [foscam.com/vms](http://foscam.com/vms).

#### ■ Add the IP Camera

1. Run Foscam VMS, then you can create a local administrator account and login.
2. Tap the "+" button on the Foscam VMS and follow the setup wizard to add your camera.

Please refer to the user manual for more detailed adding steps.



#### ■ Web User Interface

(e.g. Internet Explorer/Edge/Chrome/Firefox/Safari)

If you would like to manage your camera more professionally, we suggest you access your camera via browser. You can download the "Equipment Search Tool" from [foscam.com/tools](http://foscam.com/tools) to your computer, then access the camera directly.

## ■ Foscam Cloud Service

You can access the camera via the Foscam Cloud website:


<https://www.myfoscam.com>

Some of the benefits of viewing your camera in the cloud:


- It's simple and convenient to remotely access and manage all your WiFi security cameras.
- Enjoy the latest features first through Foscam Cloud including cloud storage and more.
- Getting started is fast—if you have already registered an account through Foscam App, you can directly use your login credentials for Foscam Cloud.

## E Hardware Installation

1. Loosen the three screws on the cover of the device, and remove the cover.
2. Insert a micro SD into the SD card slot (for local storage).

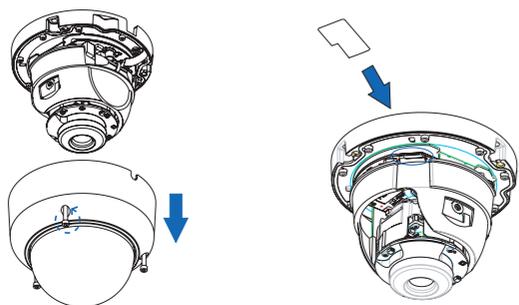


3. Install the mounting paper according to the monitored area.



### Note:

Please drill the middle hole of the mounting paper if you want to wire through the top.

4. Install the base of the device on the desired surface using the included expansion screws.

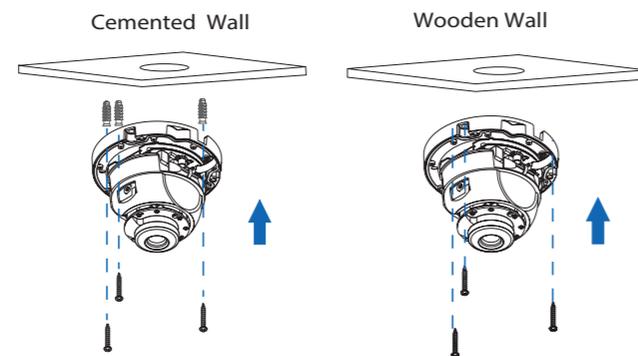


## 5. Wiring

- a. Wire out from the gap of the base, or wire through a drilled hole.
- b. Connect the camera to your LAN (Local Area Network or Internet router) via Ethernet cable.
- c. Power on the device.

6. Turn the angle of the lens.

7. Finally, fix the cover and the base with screws.

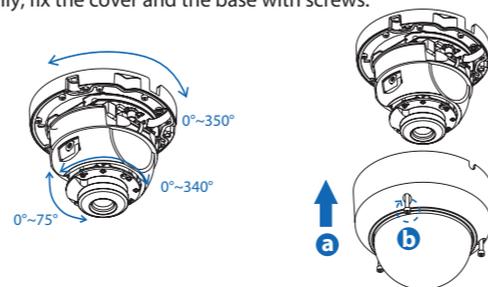

### Note:

Do not block the Array LED when rotating, so as not to affect the night vision.

## F Important Notice

### ■ Camera Username & Password

The camera username & password are used to access and manage your camera. Having a strong password can improve the security of your camera significantly.

If you have forgotten either of them, please press the "Reset" button and hold it for more than 15 seconds while the camera is powered on. After hearing the voice prompt (if the device is connected with the audio output device), release the button. The camera will automatically reboot and the default settings will be restored. You can reconnect the camera according to this Quick Setup Guide.

### ■ Foscam Cloud Service Account Username & Password

Your Foscam Cloud service account and password may be used to access both Foscam App and the Foscam Cloud service website. Therefore, you may register the account username & password on either one.

### ■ Storage Media

Your camera supports cloud, NVR (Network Video Recorder), and Micro SD card (only supports FAT-32 format) storage formats. If you wish to record and playback large amounts of video, we recommend using a Foscam NVR device as well.


### ■ Firmware Upgrade

You can upgrade the firmware of your camera with Foscam App by using the new "One-key Online Upgrade" feature (Open Foscam APP and Login the camera, select **Settings > Firmware Upgrade**).

You also can download the latest version to upgrade your camera from our official website [foscam.com/upgrades](http://foscam.com/upgrades).

### ■ Safety Tips

- Please ensure that the proper power supply is used before using the camera.
- Please install the camera securely using the screws provided.
- To avoid the risk of fire or electric shock, please keep the camera connectors in a cool, dry place.
- Change your default port to a greater range to help ensure the safety of your connection.
- Check the logs of your Foscam cameras frequently. Foscam cameras have embedded logs reminding you which IP addresses are accessing the camera.
- The cords on this product presents a potential strangulation hazard. For child safety, please keep these cords and the camera out of the reach of children.



## G Product Performance

Power Supply: DC 12V 1.0A 12W

## H Technical Support

If you have problems with your Foscam device, please contact the reseller you purchased from, or you can e-mail the headquarter technical support team: [support@foscam.com](mailto:support@foscam.com)

Your valuable comments and suggestions on improving Foscam products are welcomed!

**FOSCAM**  
home security



CE Certificate statement Website:

<http://www.foscam.com/company/ce-certificate.html>

Exporter and Importer Information Opened to Public:

<http://www.foscam.com/company/open-information.html>

Manufacturer: Shenzhen Foscam Intelligent Technology Co., Ltd  
Addr: 9/F, Block F5, TCL International E City, No.1001  
ZhongShanyuan Rd., NanShan District, Shenzhen, China, 518055

[www.foscam.com](http://www.foscam.com)

As a result of product upgrades and other reasons, this guide may not be able to update in time, resulting in inconsistency with the official website information, please take the official website ([www.foscam.com](http://www.foscam.com)) information as the standard.